


SMD Power Inductor 104CDMCC/DS




Halogen
Free




Description

- Metal compound molding type construction.
- Magnetically shielded.
- Low audible core noise.
- Suitable for large current.
- L × W × H: 11.5 × 10.3 × 4.0 mm Max.
- Product weight: 2.2 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Dimension - [mm]

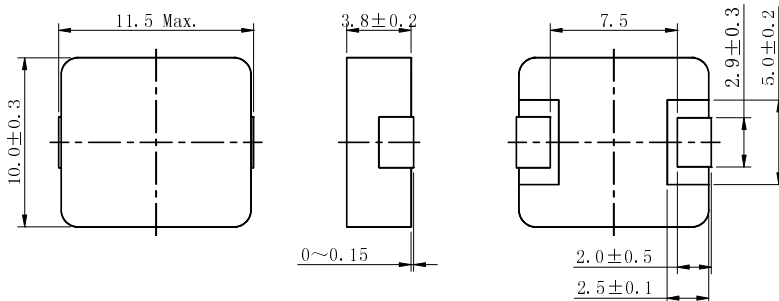

Land pattern and Schematics - [mm]

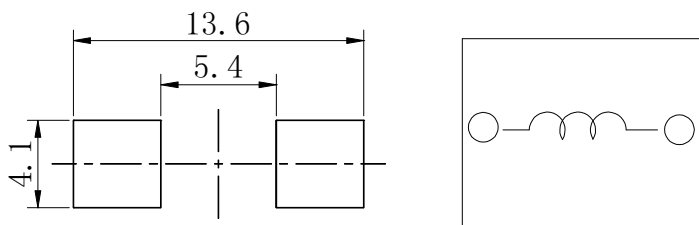

Environmental Data

- Operating temperature range: -55°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -55°C ~ +125°C
- Solder reflow temperature: 260 °C peak.

Packaging

- Carrier tape and reel packaging.
- 500pcs/Reel.

Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, Server application.
- High current, POL converters.
- Low profile, high current power supplies.
- Battery powered devices.
- DC/DC converters in distributed power systems.

SMD Power Inductor 104CDMCC/DS



Electrical Characteristics

Part No.	Stamp	Inductance [Within] (μ H) ※1	D.C.R (m Ω) Max.(Typ.) at 25°C	Saturation Current (A) Max.(Typ.) (at 25°C) ※2	Temperature rise current (A) (Typ.) ※3
104CDMCCDS-R15MC	R15	0.15 \pm 20%	0.65(0.5)	60(71)	43.0
104CDMCCDS-R22MC	R22	0.22 \pm 20%	1.0(0.9)	59(70)	38.0
104CDMCCDS-R30MC	R30	0.30 \pm 20%	1.1(0.95)	44(52)	35.0
104CDMCCDS-R36MC	R36	0.36 \pm 20%	1.2(1.05)	44(52)	32.0
104CDMCCDS-R47MC	R47	0.47 \pm 20%	1.7(1.5)	43(51)	28.0
104CDMCCDS-R56MC	R56	0.56 \pm 20%	1.8(1.6)	34(40)	27.0
104CDMCCDS-R68MC	R68	0.68 \pm 20%	2.4(2.1)	33(39)	23.5
104CDMCCDS-R80MC	R80	0.80 \pm 20%	3.0(2.6)	27(32)	23.0
104CDMCCDS-1R0MC	1R0	1.0 \pm 20%	3.3(3.0)	26(31)	19.5
104CDMCCDS-1R5MC	1R5	1.5 \pm 20%	4.2(3.8)	24(29)	19.0
104CDMCCDS-2R2MC	2R2	2.2 \pm 20%	7.0(6.0)	18(21)	15.0
104CDMCCDS-3R3MC	3R3	3.3 \pm 20%	12.0(10.0)	16(18)	12.0
104CDMCCDS-4R7MC	4R7	4.7 \pm 20%	20.0(17.0)	14(16)	11.0
104CDMCCDS-6R8MC	6R8	6.8 \pm 20%	25.0(22.0)	11.0(12.5)	8.5
104CDMCCDS-8R2MC	8R2	8.2 \pm 20%	27.0(25.0)	10.0(12.0)	8.3
104CDMCCDS-100MC	100	10 \pm 20%	30.0(27.0)	8.5(10.0)	7.5
104CDMCCDS-150MC	150	15 \pm 20%	45.0(40.0)	6.1(7.2)	6.3
104CDMCCDS-220MC	220	22 \pm 20%	66.0(58.0)	5.5(6.5)	5.0
104CDMCCDS-330MC	330	33 \pm 20%	92.0(85.0)	4.4(5.2)	4.1
104CDMCCDS-470MC	470	47 \pm 20%	145(130)	3.6(4.3)	3.2
104CDMCCDS-680MC	680	68 \pm 20%	195(178)	3.4(4.0)	2.5

※1 Measuring frequency Inductance at 100kHz ,1.0V

※2 Saturation current: The value of DC current when the inductance is over 30% of its initial value. (at 25°C)


※3 Temperature rise current: The actual value of DC current when temperature of coil rise is
 $\Delta T=40^{\circ}\text{C}(T_a=25^{\circ}\text{C})$

SMD Power Inductor 104CDMCC/DS



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT









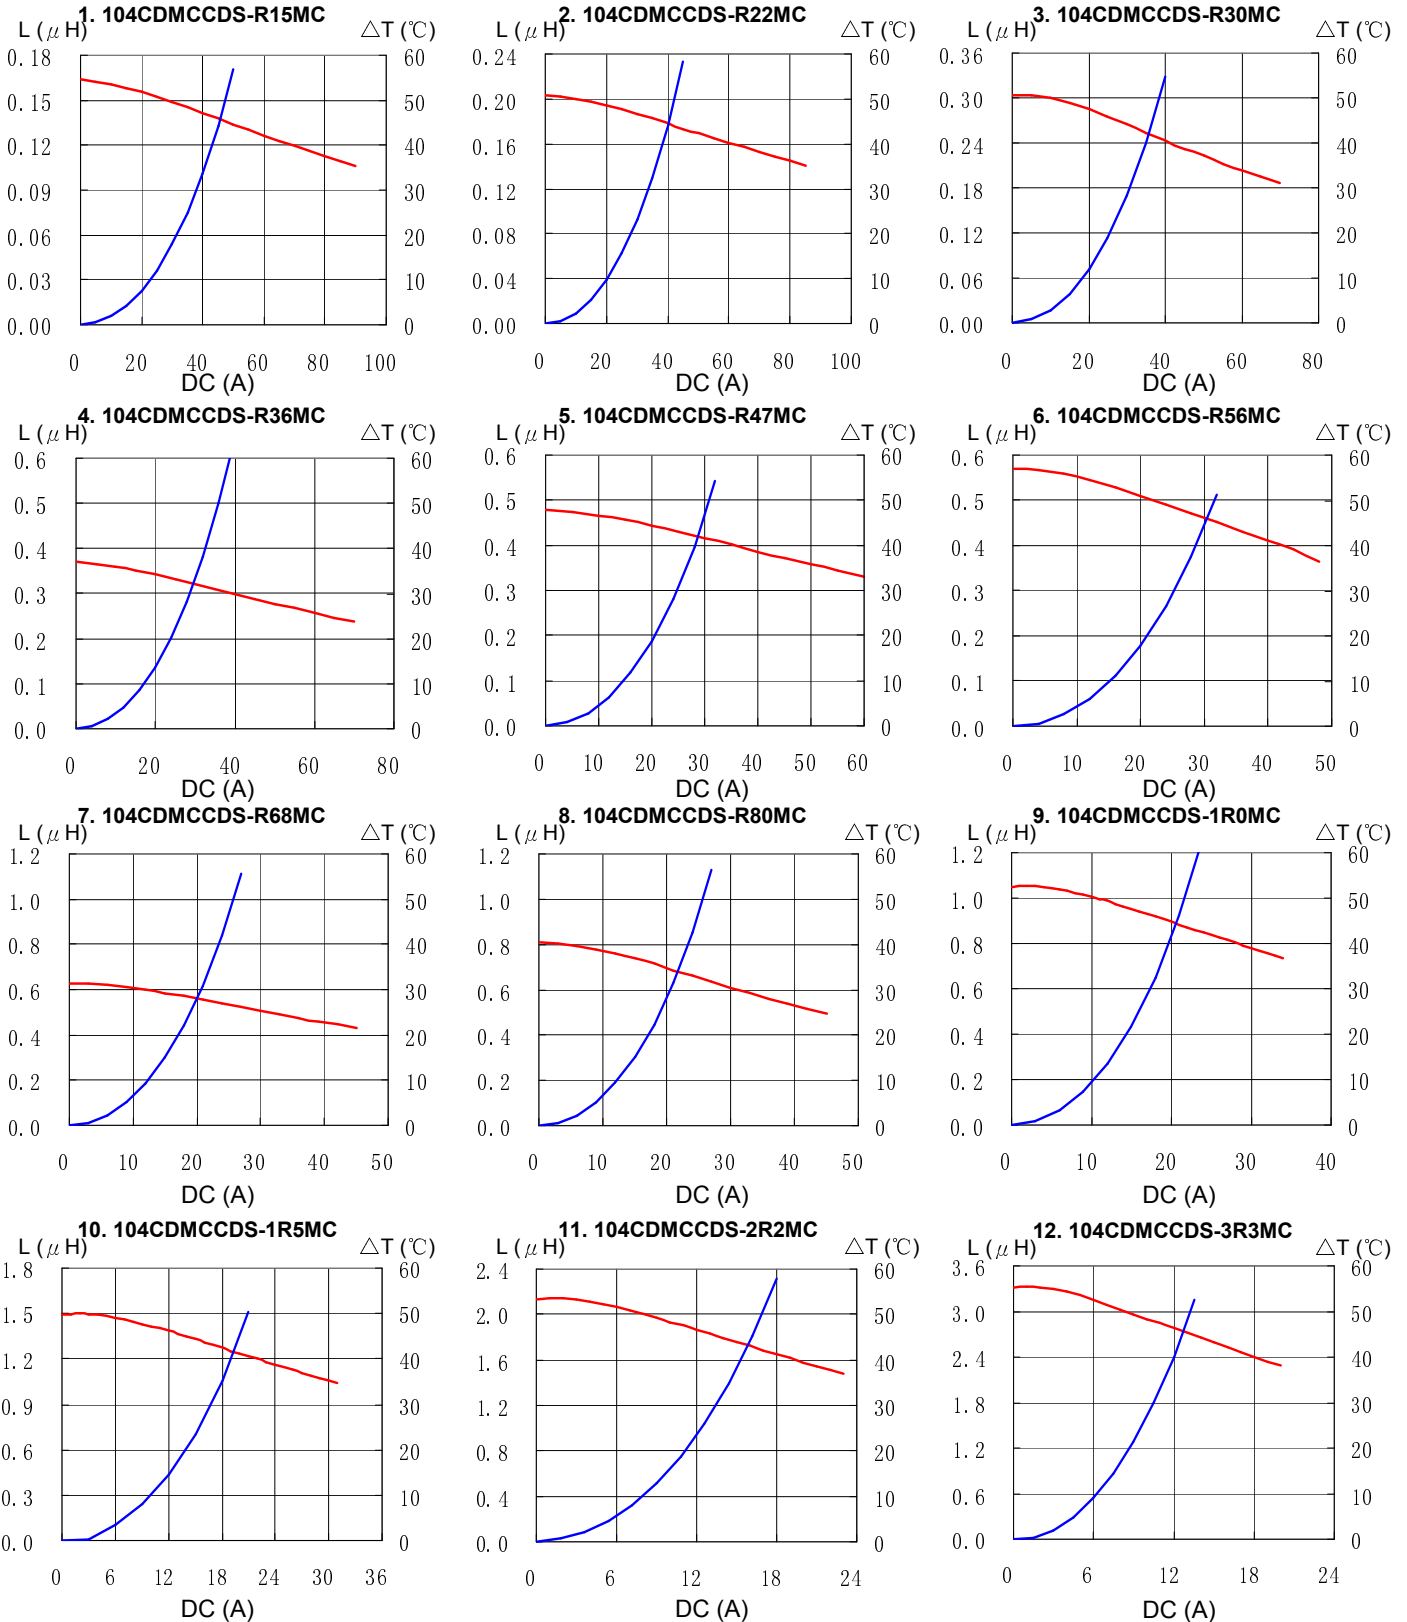


SMD Power Inductor 104CDMCC/DS



Saturation Current & Temperature Rise Graph


— L (20°C) — ΔT

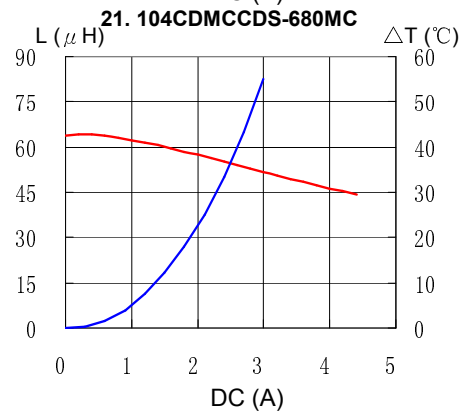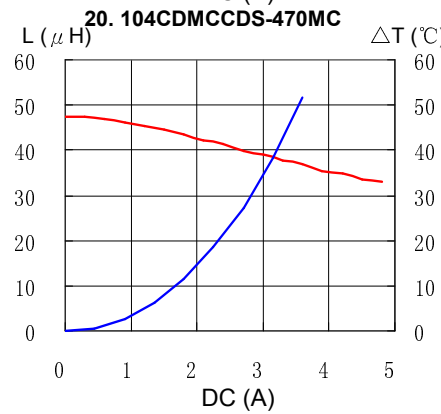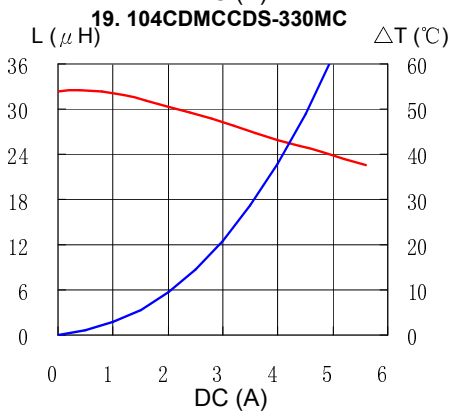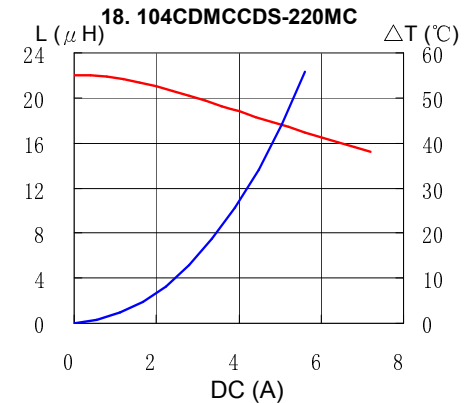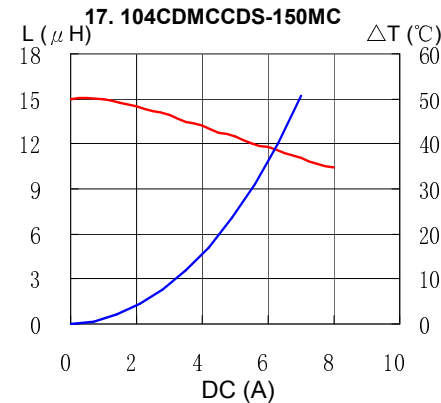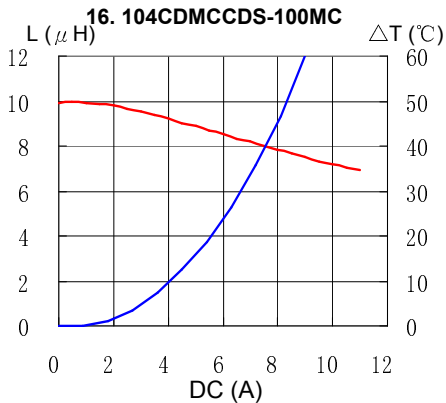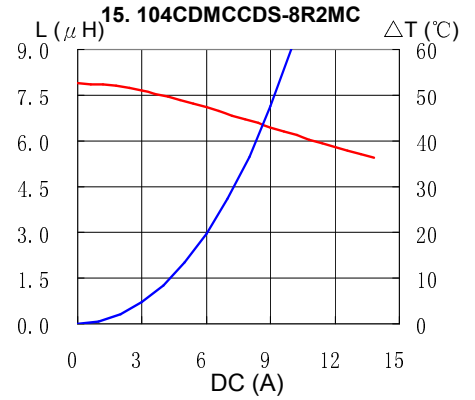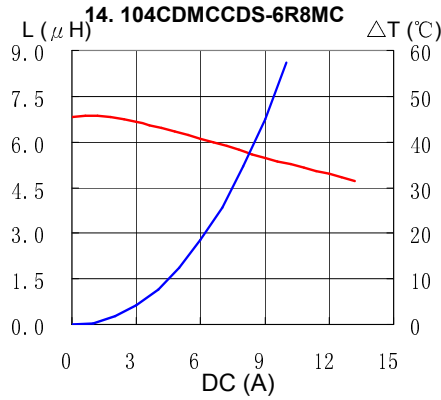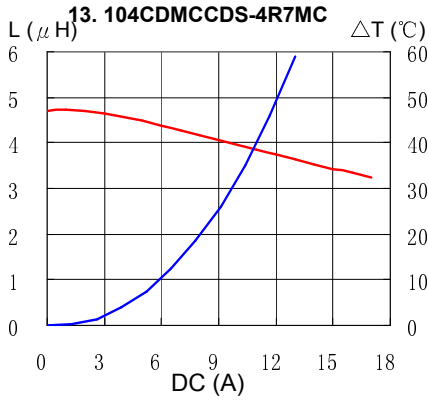

SMD Power Inductor 104CDMCC/DS



Solder Reflow Condition

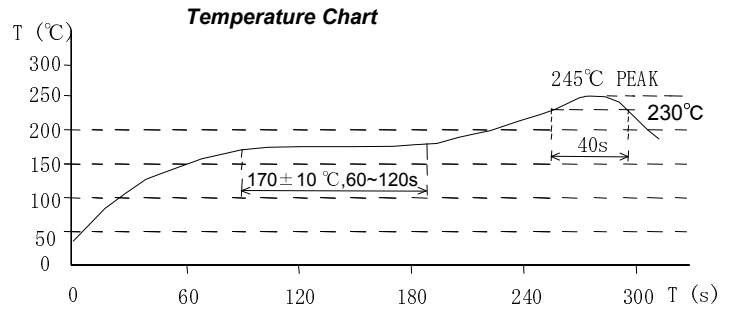

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com