


SMD Power Inductor CDEP134



Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 13.9 × 13.9 × 4.9 mm Max.
- Product weight: 2.6g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+125°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 11.8" diameter reel
- 500pcs per reel


Applications

- Ideally used in Notebook PC CPU power supply.

Dimension - [mm]

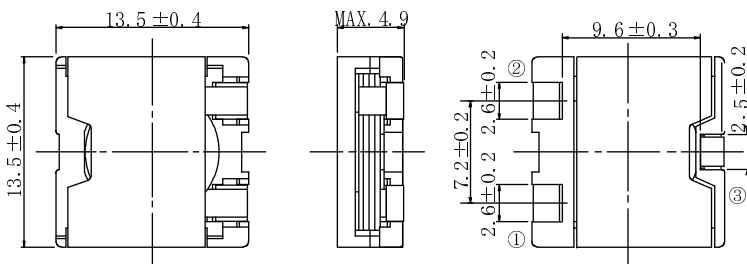

Land pattern and Schematics - [mm]

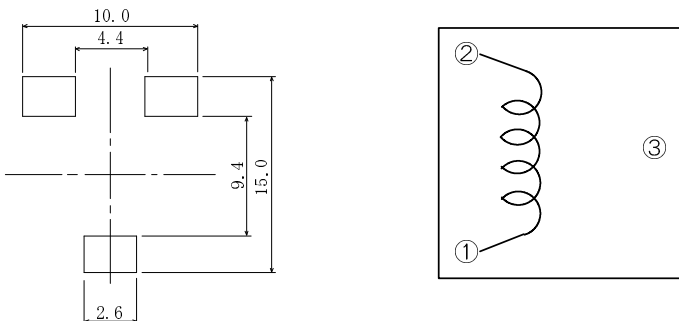

SMD Power Inductor CDEP134



Electrical Characteristics

Electrical Characteristics - 1

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (mΩ) [MAX.] (Typ.) (at 20°C)	SATURATION CURRENT (A) ※2		TEMPERATURE RISE CURRENT (A) ※3 ΔT=40°C
				(at 20°C)	(at100°C)	
CDEP134NP-0R4NC	0R4N	0.4 μH ±30%	1.9(1.6)	32.0	27.0	18.5
CDEP134NP-0R9MC	0R9M	0.9 μH ±20%	2.5(2.1)	21.6	18.4	17.0
CDEP134NP-1R6MC	1R6M	1.6 μH ±20%	3.7(3.1)	16.0	13.8	15.0
CDEP134NP-2R5MC	2R5M	2.5 μH ±20%	6.6(5.5)	12.8	11.0	10.5
CDEP134NP-3R6MC	3R6M	3.6 μH ±20%	10.8(9.0)	10.9	9.1	8.0
CDEP134NP-4R8MC	4R8M	4.8 μH ±20%	12.0(10.0)	9.3	8.0	7.5
CDEP134NP-6R4MC	6R4M	6.4 μH ±20%	16.3(13.6)	8.0	6.8	7.0
CDEP134NP-8R0MC	8R0M	8.0 μH ±20%	18.4(15.3)	7.2	6.1	6.5

Electrical Characteristics - 2

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (mΩ) [MAX.] (Typ.) (at 20°C)	SATURATION CURRENT (A) ※2		TEMPERATURE RISE CURRENT (A) ※3 ΔT=40°C
				(at 20°C)	(at100°C)	
CDEP134NP-0R3NC-H	0R3NH	0.3 μH ±30%	1.9(1.6)	35.0	32.0	18.5
CDEP134NP-0R6NC-H	0R6NH	0.66 μH ±30%	2.5(2.1)	29.0	24.0	17.0
CDEP134NP-1R2MC-H	1R2MH	1.2 μH ±20%	3.7(3.1)	21.0	17.6	15.0
CDEP134NP-1R8MC-H	1R8MH	1.8 μH ±20%	6.6(5.5)	17.6	14.4	10.5
CDEP134NP-2R7MC-H	2R7MH	2.7 μH ±20%	10.8(9.0)	14.7	12.0	8.0
CDEP134NP-3R6MC-H	3R6MH	3.6 μH ±20%	12.0(10.0)	12.5	10.2	7.5
CDEP134NP-4R8MC-H	4R8MH	4.8 μH ±20%	16.3(13.6)	11.0	9.0	7.0
CDEP134NP-6R0MC-H	6R0MH	6.0 μH ±20%	18.4(15.3)	9.6	8.0	6.5

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% (while the inductance tolerance is ±30%) or 75% (while the inductance tolerance is ±20%) of its nominal.













※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

SMD Power Inductor CDEP134



Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

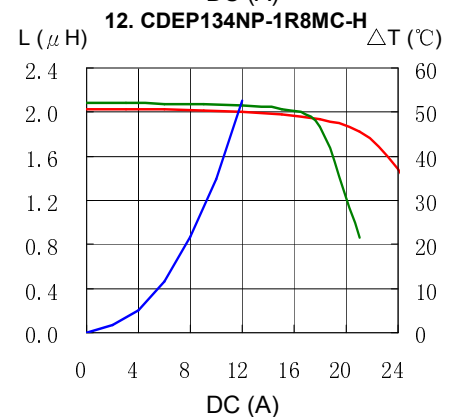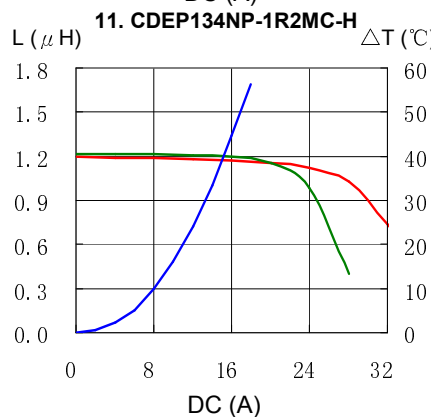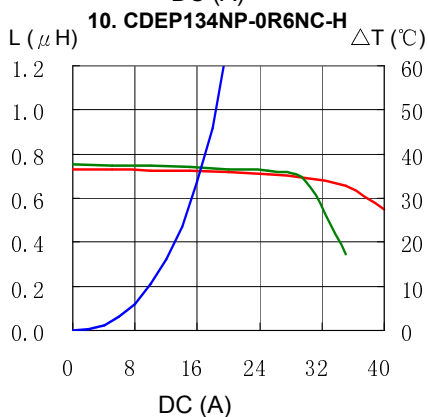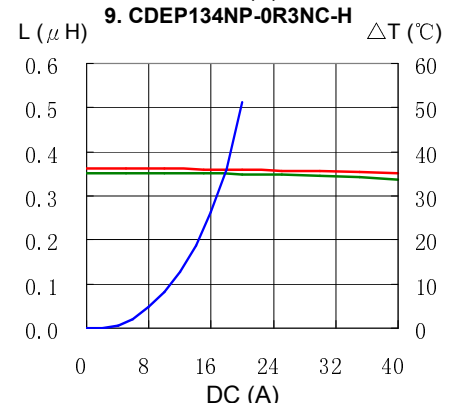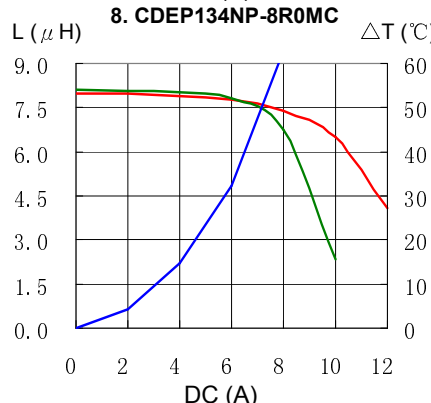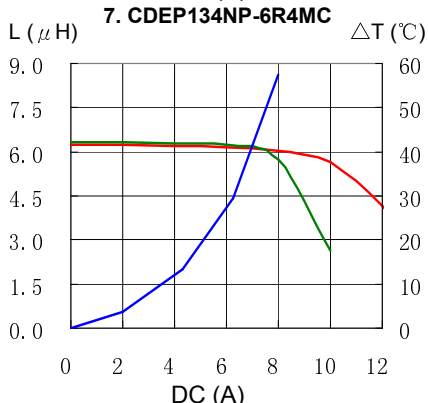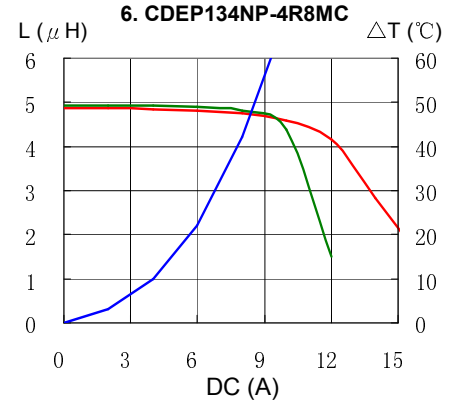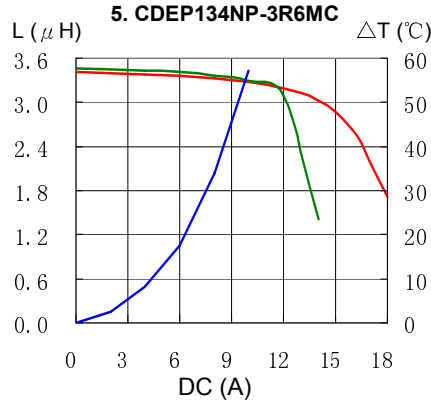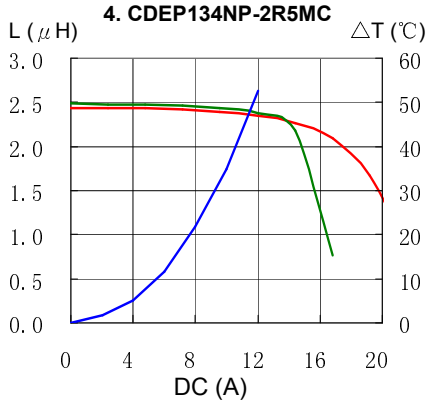
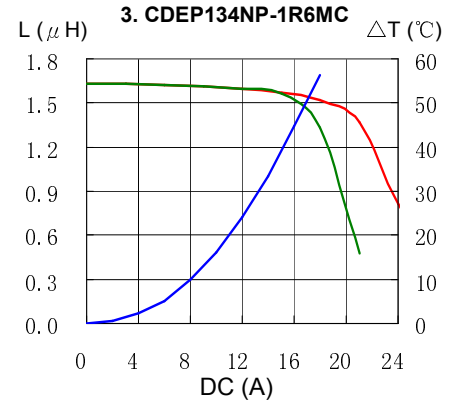
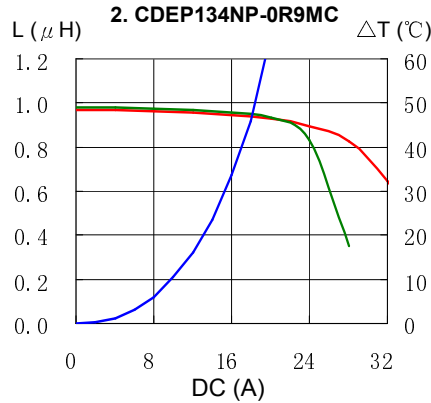
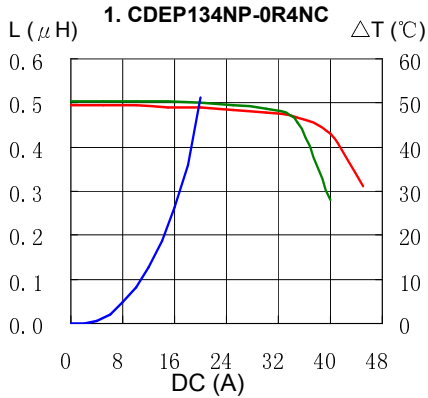


SMD Power Inductor CDEP134





Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

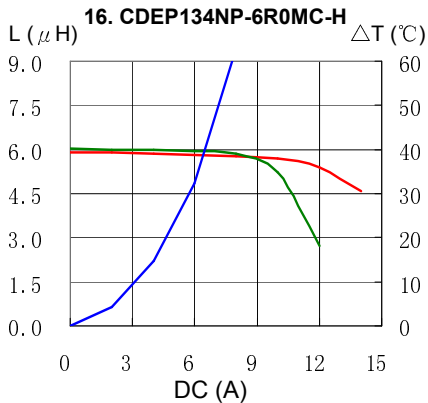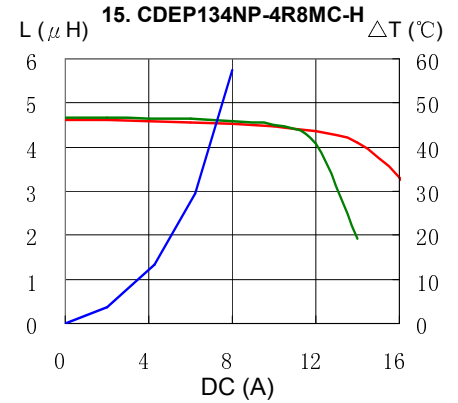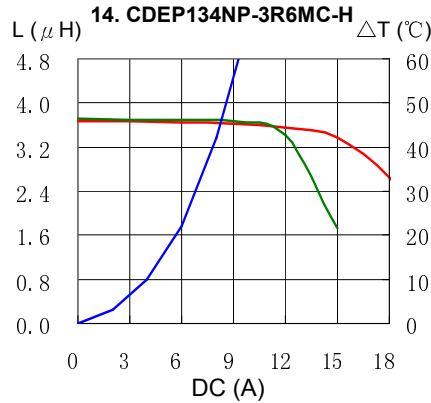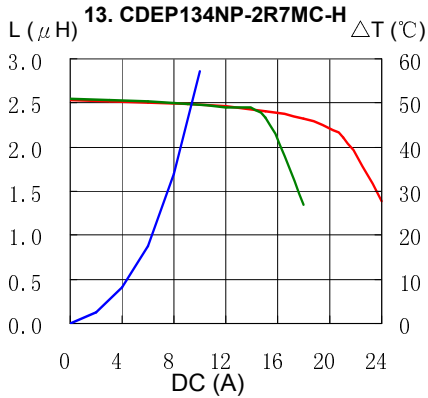

Solder Reflow Condition

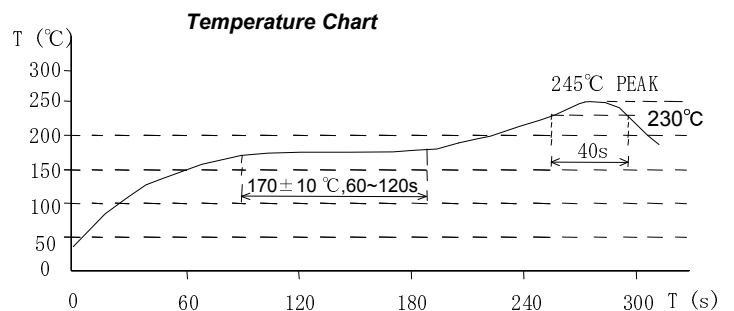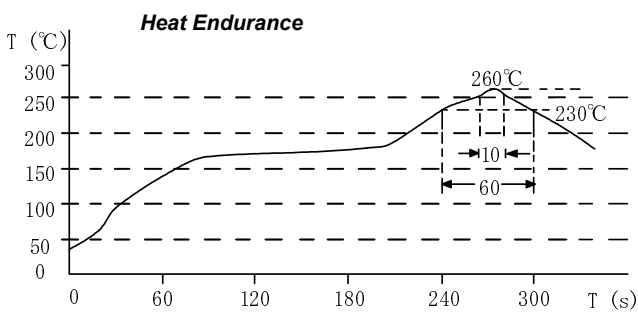

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com
Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com
Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com
Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com
Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com
Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com
Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com
San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com