

# CMI-CSSP7040NF-101M



## Features


- ▶ Magnetic shield type wound inductor for power circuits.
- ▶ Available tape and reel for auto insertion.
- ▶ RoHS compliant
- ▶ AEC-Q200 qualified.

## Applications

- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)




Dimension (Unit:mm)

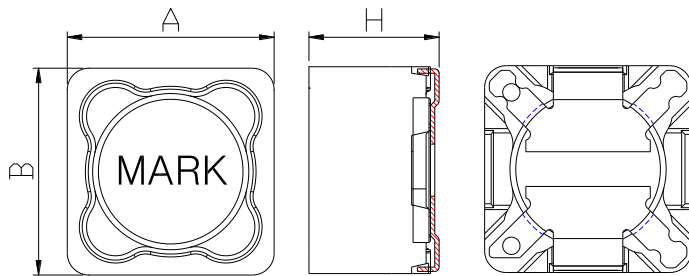

A	B	H
7.15±0.2	7.15±0.2	4.0 Max

Land Pattern (Unit:mm)

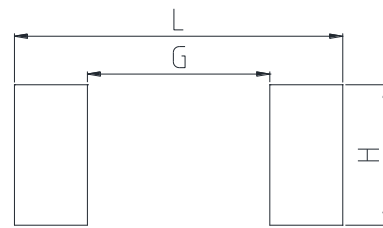

L	G	H
7.4	5.0	3.0

## Specifications

Part Number	Inductance (uH)	Tolerance (±)	DCR (mohm) ±20%	IDC1(A) Max	IDC2(A) Max	Test Frequency (Hz)
CMI-CSSP7040NF-101M	100	20%	325	0.95	0.95	100k

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °c

Ilсан Sales Office (KOREA)

+82)31-904-1444

[coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

H.K Sales Office (HONGKONG)

+852)2711-5551

[coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

Shenzhen Sales Office (CHINA)

+86)755-8663-6929

[coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

LA Sales Office (USA)

+1)866-446-3586

[coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

Hungary Sales office (EUROPE)

+36)30-913-7706

[coilmaster@coilmaster.com](mailto:coilmaster@coilmaster.com)

- All specifications are subject to change without notice.
- Update date : 2018.03.13