

Leaded Inductors (Fixed Choke Coils)

FASTRON leaded inductors come with a very wide inductance range from 0.1 μ H to 100000 μ H and with high Q values. They are available in tape and ammopack packing.

Applications

These components are suitable for decoupling and interference suppression.

Communication: RF blocking and filtering, e.g. 12 ~ 16 kHz blocking filter.

Others: Automotive electronics, electronic household appliances, entertainment electronics, lighting devices, medical applications.

Technical Data

L – Value (rated inductance)	Measured with Bode 100 Vector Network Analyzer or equivalent at frequency f_L
Q – Factor (min)	Measured with Bode 100 Vector Network Analyzer or equivalent at frequency f_Q
SRF (min)	Measured with HP 8753ES Network Analyzer or equivalent
DCR (max)	Measured at 25°C
Rated DC Current	I based on temperature rise, determined at the point where the temperature rise does not exceed 40°C above the ambient temperature of 25°C I1 Current based on ambient temperature of 40°C and component temperature of max. 125°C Isat Current based on inductivity drop of 10% related to the unloaded inductivity
Operating Temperature	-55°C to +125°C (including component self-heating)
Recommended soldering method	Wave
Solderability	Using lead free solder (Sn 99.9) at 260°C \pm 5°C for 5 \pm 0.5 seconds, min 90% solder coverage of metallization Standard: IEC 68-2-20 (Ta)
Resistance to Soldering Heat	Resistant to 260°C \pm 5°C for 10 \pm 1 seconds Standard: IEC 68-2-20 (Tb)
Resistance to Solvent	Resistant to Isopropyl alcohol for 5 \pm 0.5 minutes at 23°C \pm 5°C Standard: IEC 68-2-45
Climatic Test	Defined by the following standards IEC 68-2-1 for Cold test: -55°C for 96 hours IEC 68-2-2 for Dry heat test: +125°C for 96 hours IEC 60068-2-78 for Humidity test: 40°C at RH 95% for 4 days
Tensile Strength of Leads (Pull Test)	Components withstand a pulling force of 10N for 10 \pm 1 second For MICC, MICC/N, MICCS, MICCS/N : Components withstand a pulling force of 5N for 10 \pm 1 second IEC 60068-2-21 (Ua1)
Mechanical Shock	Mil-Std 202 Method 213 Condition C 3 axis, 6 times, total 18 shocks 100 G, 6 ms, half-sine
Vibration	Mil-Std 202 Method 204 20 mins at 5G 10 Hz to 2000 Hz 12 cycles each of 3 orientations

Colour Coding Reference according to IEC 60062 :

L (μ H)	Nominal Inductance (μ H)				Tol. **
Code	Band 1	Band 2	Band 3	Band 4	code
Gold	---	---	x 0.1	\pm 5 %	J
Silver	---	---	x0.01	\pm 10 %	K
Clear	---	---	---	\pm 20 %	M
Black	---	0	x1	---	---
Brown	1	1	x10	\pm 1 %	F
Red	2	2	x100	\pm 2 %	G
Orange	3	3	x1000	\pm 3 %	A
Yellow	4	4	x10000	---	---
Green	5	5	---	---	---
Blue	6	6	---	---	---
Violet	7	7	---	---	---
Grey	8	8	---	---	---
White	9	9	---	---	---

Ordering Code

Example: SMCC-180X-YY

SMCC - **180** **X** - **YY**
(Model) (Inductance Value) (Tolerance) (Packing Code)


↓
SMCC-180K-01

Core Type - Ferrite, Phenolic

Tolerances - F (1%), G (2%), H (2.5%), A (3%), J (5%), K (10%), M (20%)

Packing Code

Packing Form	Taped / Reel	Taped / Ammo pack
Axial	01	02
Radial	31	32

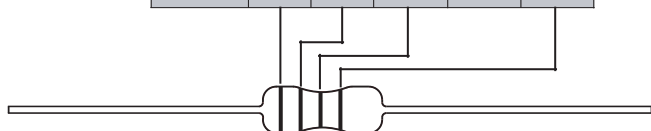

Packing Specification

Fig. 1: On Reel (Plastic)

Packing code : 01, 31

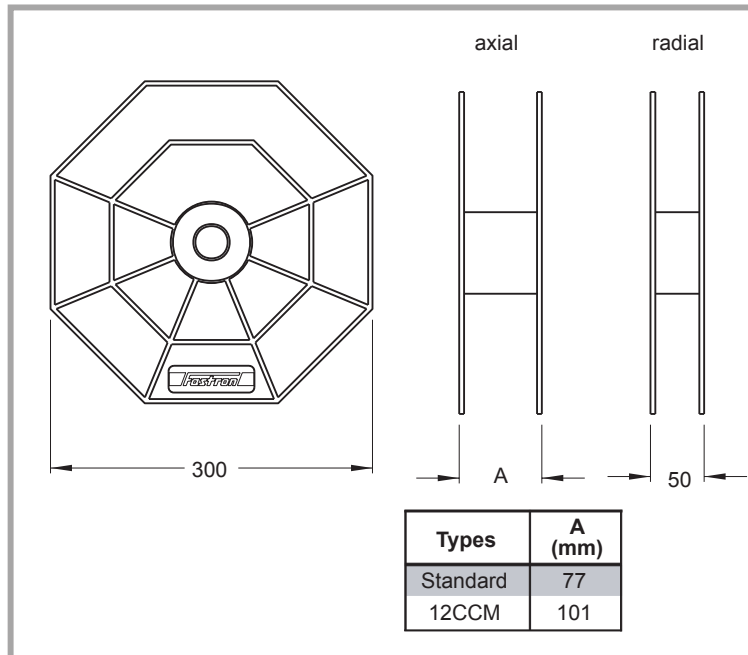


Fig. 2: Ammo pack, axial

Packing code : 02

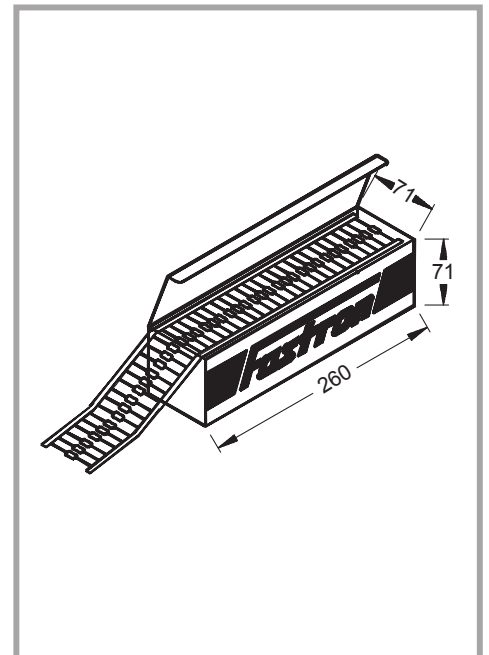


Fig. 3: Axial Standard Taping

Packing code : 01, 02


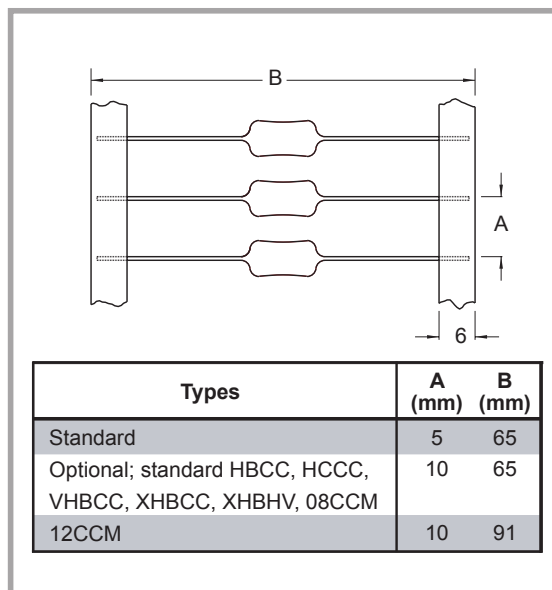


Fig. 4: Axial Narrow Taping (38mm)

Packing code : 11, 12

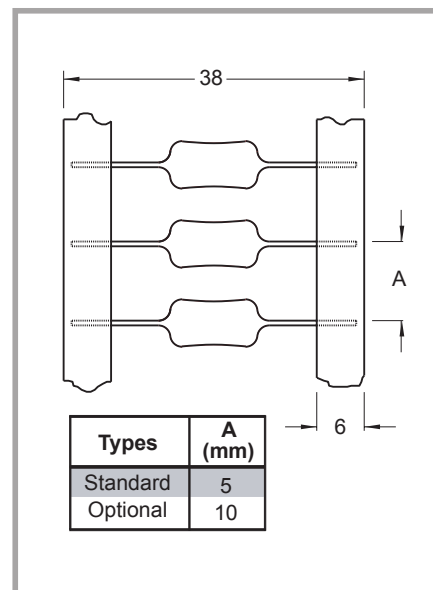

Packing Specification

Fig. 5: Radial Taping
Packing code : 31, 32

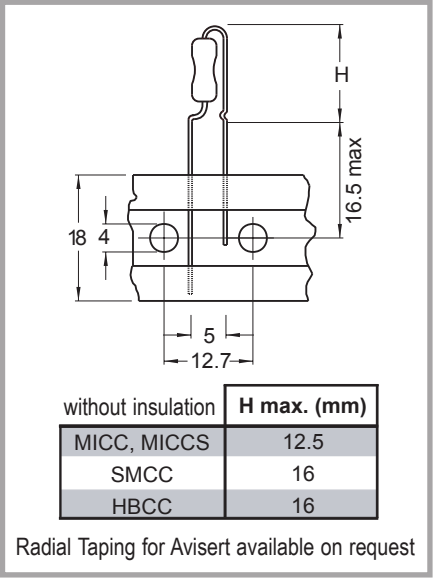


Fig. 6: Ammo pack, radial
Packing code : 32




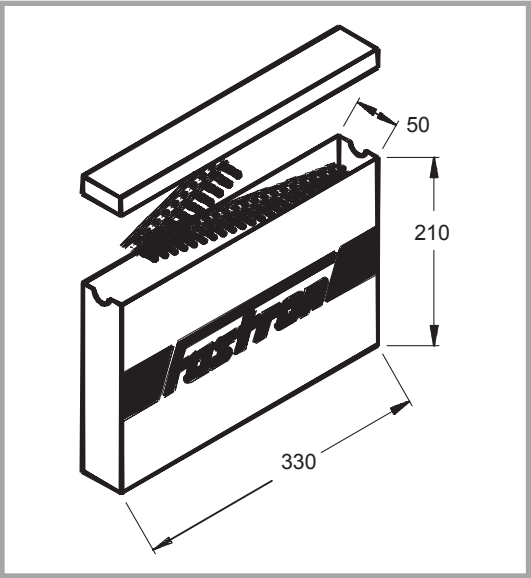


Fig. 7: Axial preformed
Packing code : 20

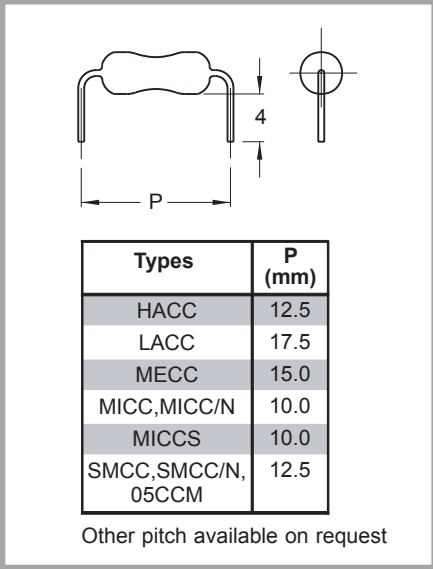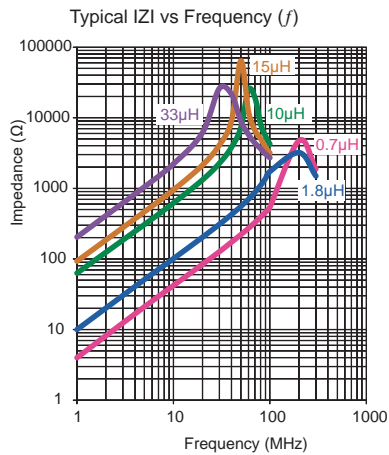

HCCC

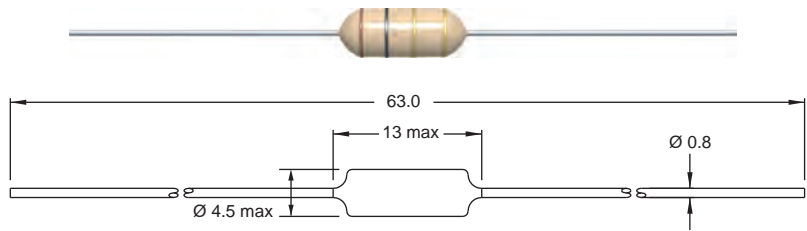

Single layer (typ)

Part No	Inductance L (μH)	f _L (MHz)	Tol ± (%)	DCR max (Ω)	Rated DC Current (A)
HCCC-R70M-YY	0.7	1	20	0.018	7.00
HCCC-1R0X-YY	1.0	1	10,20	0.018	4.00
HCCC-1R2X-YY	1.2	1	10,20	0.035	2.60
HCCC-1R5X-YY	1.5	1	10,20	0.050	2.50
HCCC-1R8X-YY	1.8	1	10,20	0.066	2.50
HCCC-2R2X-YY	2.2	1	10,20	0.070	2.30
HCCC-2R7X-YY	2.7	1	10,20	0.080	2.30
HCCC-3R3X-YY	3.3	1	10,20	0.115	1.80
HCCC-3R6X-YY	3.6	1	10,20	0.132	1.80
HCCC-3R9X-YY	3.9	1	10,20	0.132	1.70
HCCC-5R6X-YY	5.6	1	10,20	0.140	1.50
HCCC-6R8X-YY	6.8	1	10,20	0.276	1.50
HCCC-8R2X-YY	8.2	1	10,20	0.276	1.50
HCCC-100X-YY	10	1	10,20	0.320	1.30
HCCC-120X-YY	12	1	10,20	0.650	0.70
HCCC-150X-YY	15	1	10,20	1.100	0.60
HCCC-180X-YY	18	1	10,20	1.200	0.60
HCCC-220X-YY	22	1	10,20	2.500	0.40
HCCC-270X-YY	27	1	10,20	2.900	0.30
HCCC-330X-YY	33	1	10,20	3.300	0.30

Core Material: Ferrite

Revision date: 11 Aug 2014

SPQ:

Packaging Form	Taped / Reel	Taped / Ammo pack
Axial	2500 [-01]	800 [-02]