


SMD Power Inductor CDRH3D28



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 4.0 × 4.0 × 3.0 mm Max.
- Product weight: 130m g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 7.0" diameter reel
- 500pcs per reel


Applications

- Ideally used in Mobilephone, PDA, MP3, DSC/DVC, Portable DVD, etc as DC-DC converter inductors.

Dimension - [mm]

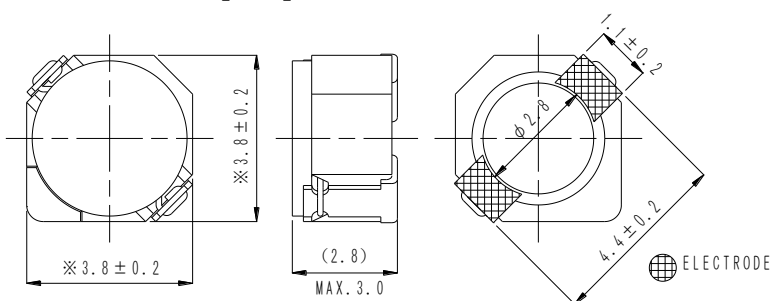

Land pattern and Schematics - [mm]

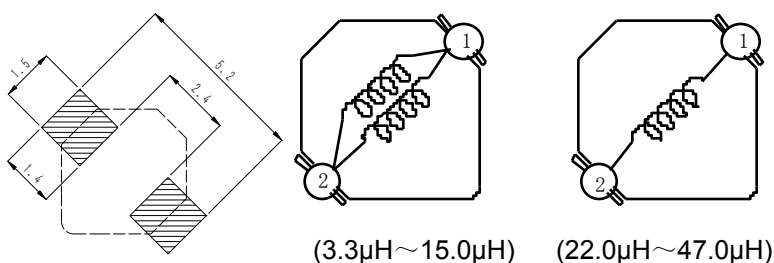

Electrical Characteristics

| Part Name | Stamp | Inductance (µH) [within] ※1 | D.C.R. (mΩ) Max. (Typ.) (at 20°C) | Saturation Current (A) ※2 | | Temperature Rise Current (A) ※3 |
|------------------|-------|--------------------------------|---|---------------------------|----------|---------------------------------|
| | | | | at 20°C | at 100°C | |
| CDRH3D28NP-1R0NC | L | 1.0µH ± 30% | 37.5(30.0) | 3.00 | 2.40 | 2.60 |
| CDRH3D28NP-3R3NC | A | 3.3 ± 30% | 72.1(57.7) | 2.00 | 1.48 | 1.85 |
| CDRH3D28NP-4R7NC | B | 4.7 ± 30% | 88.3(70.6) | 1.65 | 1.28 | 1.62 |
| CDRH3D28NP-6R8NC | C | 6.8 ± 30% | 119(95.0) | 1.24 | 0.94 | 1.32 |
| CDRH3D28NP-100NC | D | 10 ± 30% | 145(116) | 1.05 | 0.80 | 1.18 |
| CDRH3D28NP-150NC | E | 15 ± 30% | 213(170) | 0.90 | 0.64 | 1.02 |
| CDRH3D28NP-220NC | F | 22 ± 30% | 335(268) | 0.76 | 0.55 | 0.74 |
| CDRH3D28NP-330NC | G | 33 ± 30% | 481(385) | 0.58 | 0.44 | 0.63 |
| CDRH3D28NP-470NC | H | 47 ± 30% | 599(479) | 0.48 | 0.36 | 0.56 |

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% of it's nominal value.










※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDRH3D28




Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) — ΔT

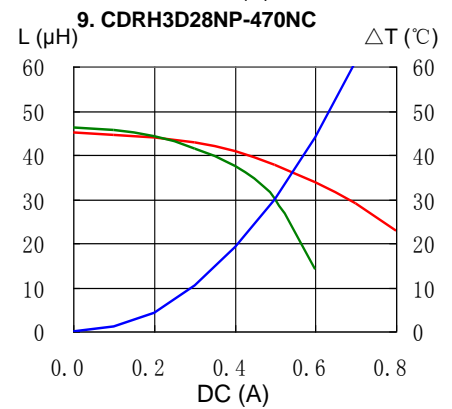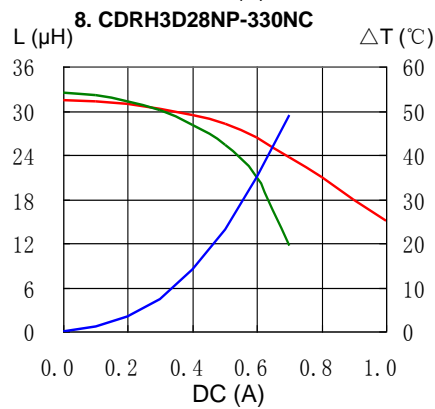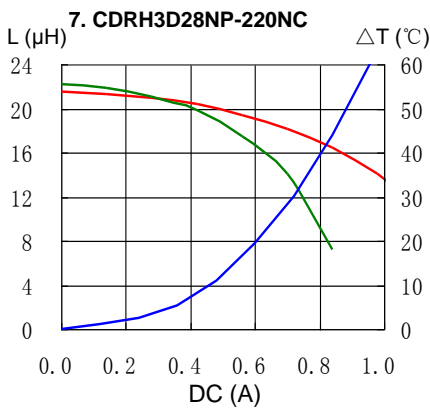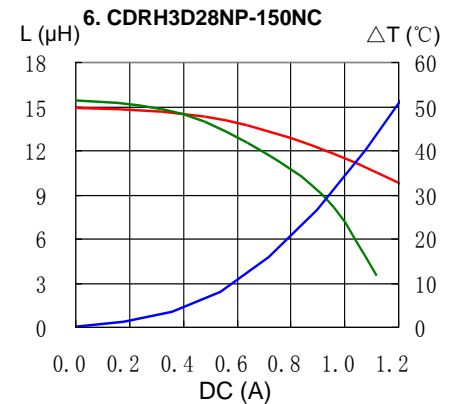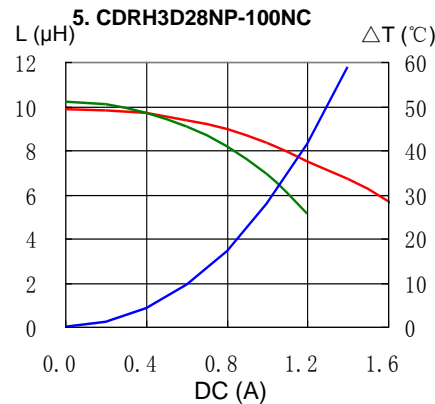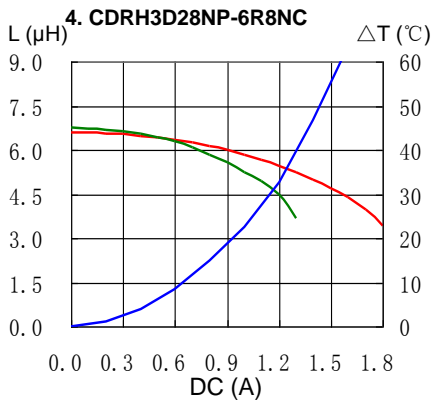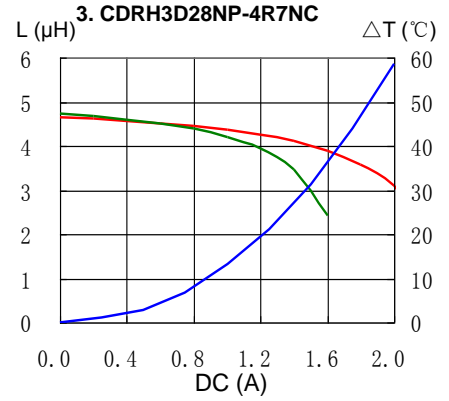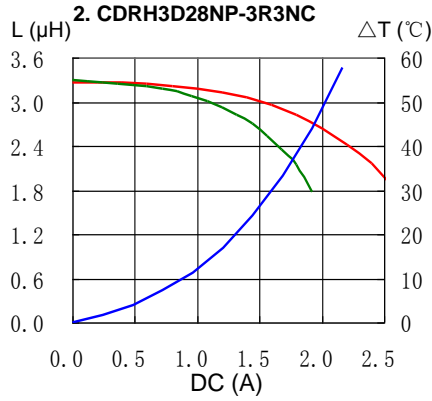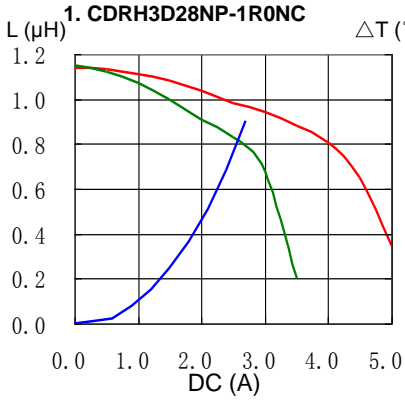


SMD Power Inductor CDRH3D28

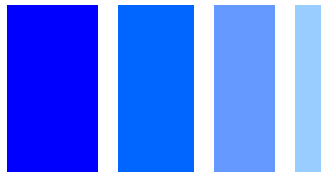


Solder Reflow Condition

Heat Endurance

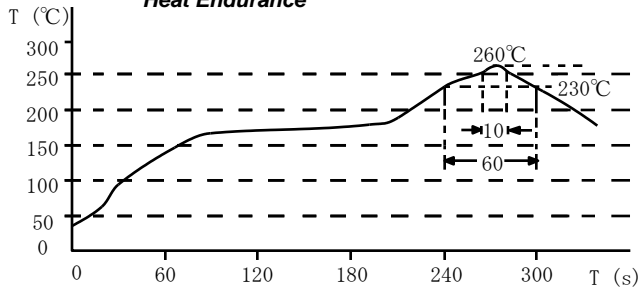

Temperature Chart

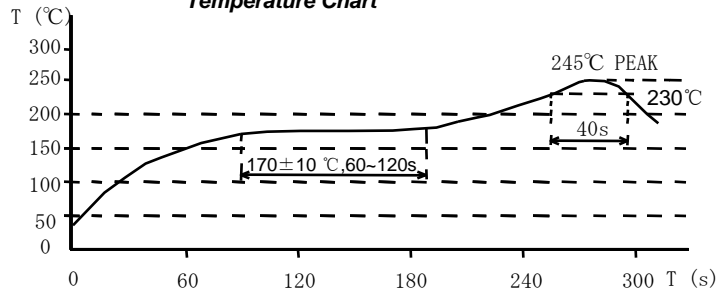

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com