

CTDO5022F Series

From 1.0 μH to 1,000 μH


ENGINEERING KIT #11F



CHARACTERISTICS

- Description:** SMD power inductor.
- Applications:** DC/DC converters, computers, LCD displays, telecommunication equipment and PDA palm tops. Designed for the higher current requirements of portable computers.
- Operating Temperature:** -40°C to $+85^{\circ}\text{C}$
- Inductance Tolerance:** $\pm 20\%$
- Inductance Drop:** 10% typically at I_{sat} .
- Testing:** Inductance is tested on an HP4285A at 100KHz.
- Packaging:** Tape & Reel.
- Marking:** Color dots OR Inductance code.
- Miscellaneous:** RoHS Compliant.
- Additional Information:** Additional electrical & physical information available upon request
- Samples available.** See website for ordering information.

PAD LAYOUT

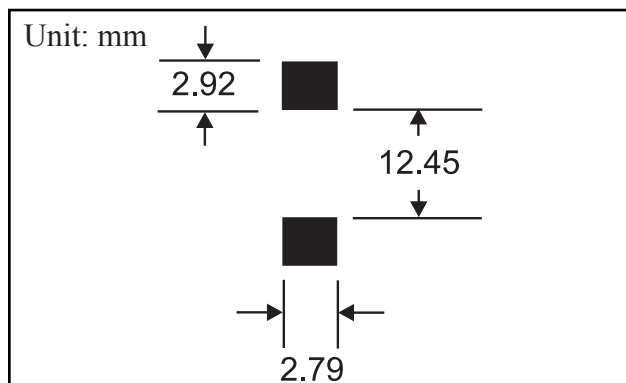

SPECIFICATIONS

Parts are available in $\pm 20\%$ inductance tolerance only.

Part Number	Inductance (μH)	L Test Freq. (KHz)	SRF Typ. (MHz)	DCR $\pm 15\%$ (Ω)	I_{sat} (A)	I_{rms} (A)
CTDO5022PF-102	1.0	100	80	.011	20	8.6
CTDO5022PF-222	2.2	100	80	.014	16	7.1
CTDO5022PF-332	3.3	100	60	.016	14	6.2
CTDO5022PF-562	5.6	100	40	.022	12	5.3
CTDO5022PF-103	10	100	30	.032	10	4.3
CTDO5022PF-153	15	100	22	.036	8.0	4.0
CTDO5022PF-223	22	100	20	.047	7.0	3.5
CTDO5022PF-333	33	100	15	.066	5.5	3.0
CTDO5022PF-473	47	100	9	.087	4.5	2.6
CTDO5022PF-683	68	100	8	.13	3.5	2.3
CTDO5022PF-104	100	100	7	.19	3.0	1.8
CTDO5022PF-154	150	100	6	.25	2.6	1.5
CTDO5022PF-224	220	100	5	.38	2.4	1.2
CTDO5022PF-334	330	100	4	.56	1.9	1.0
CTDO5022PF-474	470	100	3	.85	1.4	.82
CTDO5022PF-684	680	100	2.5	1.2	1.2	.72
CTDO5022PF-105	1000	100	2	1.8	1.0	.56

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C	D	E	F
mm	18.54	15.24	7.0 \pm 0.5	2.54	2.54	12.7
inches	0.73	0.6	0.27 \pm 0.02	0.1	0.1	0.5

Parts will be marked with Significant Digit Dots OR Inductance Code

