


CTHF2836F

Series

From 1.8mH to 35mH

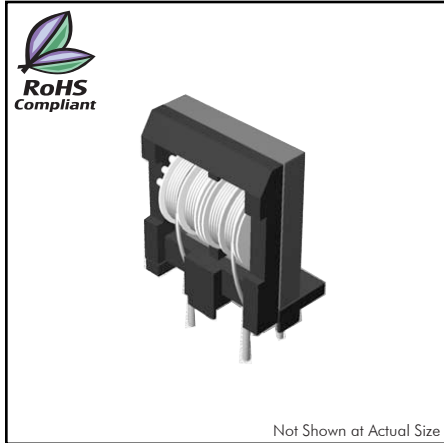

CHARACTERISTICS

Description: Common mode choke coils

Applications: For AC power supply/compact, separable bobbin

Rated Voltage: 250Vac

Operating Temperature: -20°C to +105°C (including self temperature rise)

Temperature Rise: 45°C maximum each line

Dielectric Withstanding Voltage: 2000Vac between each winding for 1 minute

Additional Information: RoHS Compliant. Additional electrical & physical information available upon request. Different inductance and current products are available as well

Samples available. See website for ordering information.

SPECIFICATIONS

*Indicates the inductance difference between the coil L1 and L2

Part Number	Inductance (Min.) (mH)	Inductance Difference* (μH Max.)	DCR Max. (Ω)	Rated Iac Current (Max.) (A)
CTHF2836F-353M1R0	35	650	0.78	1.0
CTHF2836F-253M1R2	25	500	0.56	1.2
CTHF2836F-203M1R5	20	400	0.41	1.5
CTHF2836F-123M1R8	12	300	0.27	1.8
CTHF2836F-802M2R0	8.0	200	0.18	2.0
CTHF2836F-562M2R5	5.6	150	0.13	2.5
CTHF2836F-472M2R8	4.7	150	0.10	2.8
CTHF2836F-332M3R0	3.3	100	0.088	3.0
CTHF2836F-182M4R0	1.8	40	0.05	4.0

PHYSICAL DIMENSIONS

