


# MWB Series


## Wideband RF Transformer

# MIL-T-55631

## QPL Approved

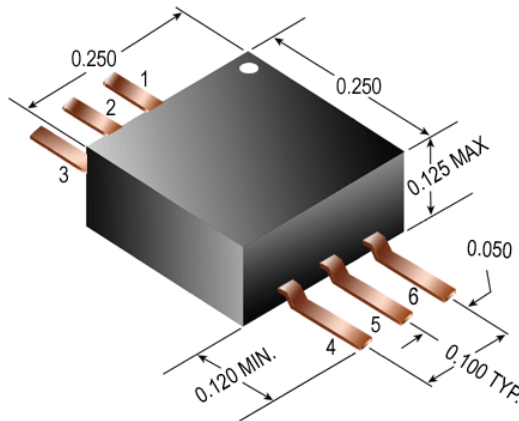

Footprint

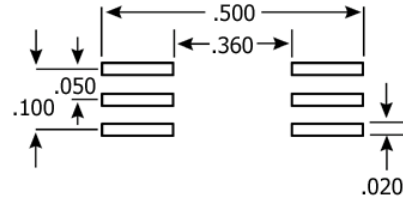

### FEATURES

- Low EMI Radiation
- Low Thermal Expansion permits mounting on most substrate materials

### SPECIFICATIONS

- Frequency Response: 500 kHz to 350 MHz
- Power Rating: 250 mW
- Operating Temperature Range: -55°C to 125°C
- Temperature Rise (at 90°C): 35°C
- Dielectric Withstanding Voltage: 300 VAC
- Moisture, Shock, and Immersion Resistant
- Terminals meets solderability per MIL-STD-202, Method 208
- Welded Connections, Transfer Molded Package
- Space Application: Available to MIL-STD-981

Configuration	Part Number	Impedance Ratio Pri : Sec	Max Insertion Loss @50 MHz (dB)	Max VSWR @50 MHz	Min Bandwidth (MHz)	
					0.5 db (Ripple)	3 dB Points
<b>MWB1000 Series</b>						
	MWB1010	1 : 1	0.9	1.35	7.0 - 100	1.2 - 350
	MWB1015	1 : 1.5	1.7	1.65	8.0 - 70	4.0 - 170
	MWB1020	1 : 2	1.3	1.40	3.0 - 85	0.9 - 200
	MWB1040	1 : 4	1.1	1.25	4.0 - 130	1.0 - 250
	MWB1016	1 : 16	1.5*	1.95*	12 - 25	2.5 - 110
<b>MWB2000 Series</b>						
	MWB2010	1 : 1	0.7	1.30	5.0 - 130	1.0 - 390
	MWB2015	1 : 1.5	1.5	1.60	6.0 - 90	3.0 - 200
	MWB2020	1 : 2	1.1	1.35	2.0 - 100	0.5 - 230
	MWB2040	1 : 4	0.9	1.20	2.0 - 150	0.8 - 300
	MWB2016	1 : 16	1.2*	1.70*	12 - 35	2.0 - 140
<b>MWB3000 Series</b>						
	MWB3010	1 : 1	0.7	1.30	5.0 - 130	1.0 - 390
	MWB3015	1 : 1.5	1.5	1.60	6.0 - 90	3.0 - 200
	MWB3020	1 : 2	1.1	1.35	2.0 - 100	0.5 - 230
	MWB3040	1 : 4	0.9	1.20	2.0 - 150	0.8 - 300
	MWB3016	1 : 16	1.2*	1.70*	12 - 35	2.0 - 140
*Measured at 15 MHz						



Coast / Advanced Chip Magnetics

4225 Spencer Street, Torrance CA 90503 · Phone 310-370-8188 · Fax 310-370-8388

Web: [www.coastacm.com](http://www.coastacm.com) · Email: [sales@coastacm.com](mailto:sales@coastacm.com)