




# LEADED BEADS




EMI Filters

## BEAD/92

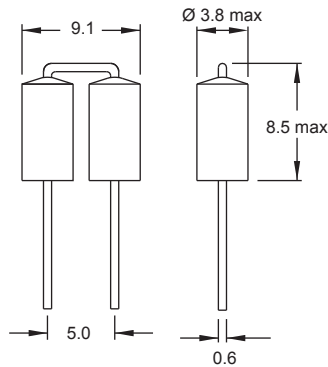

Z-f Characteristics

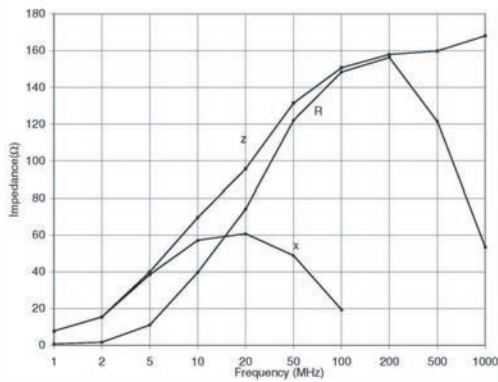

Part No	Impedance Z (Ω)				DCR max (mΩ)	Rated DC Current (A)
	10MHz		25MHz			
	Min	typ	Min	typ		
Bead /92-999X-51	50	80	70	110	20	6

Core Material : Ferrite

Revision date : 04 Aug 2014

SPQ : Taped / Reel 2000 [-51]

Remark : Either one of the impedance parameter is guaranteed

Wide Band Chokes and Beads