

CMI-CMMPP151508SH-SERIES



Features


- ▶ A low height(8.5mm in height)is a achieved.
- ▶ Large current is achieved in a small shape.
- ▶ Small and low profile inductors.
- ▶ Low EMI emission.
- ▶ RoHS compliant



Applications


- ▶ For DC/DC converter(LED/OLED TV, TABLAT, DISPLAY,GRAPHIC CARD, NOTE PC, SETTOP, etc.)
- ▶ Equipment using for automobiles (ECM, airbags, headlights, electronic Powder steering, motors, ABS, other)

Dimension (Unit:mm)

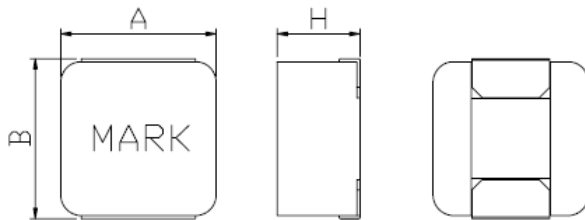

A	B	H
15±0.5	16.5±0.4	8.5Max

Land Pattern (Unit:mm)



L	G	H
16.0	8.50	8.50

Specifications

Part Number	Inductance (uH) ±20%	DCR(mohm) Max(Typ)	IDC1(A) Max(Typ)	IDC2(A) Max(Typ)	Test Frequency (Hz)
CMI-CMMPP151508SH-6R8M	6.8	32	10.00		1M
CMI-CMMPP151508SH-100M	10	38	8.00		1M
CMI-CMMPP151508SH-180M	18	55	6.00		1M
CMI-CMMPP151508SH-220M	22	58	5.50		1M
CMI-CMMPP151508SH-330M	33	140	4.50		1M
CMI-CMMPP151508SH-470M	47	150	4.00		1M

- IDC1: When based on the inductance change rate (approximately 30% below in the initial value)
- IDC2: When based on the temperature increase (Temperature increase of approximately 40°C by self heating)
- Operating Temperature Range(including self temperature) : -40°C ~ +165 °C

Ilsan Sales Office (KOREA)
 H.K Sales Office (HongKong)
 Shenzhen Sales Office (CHINA)
 LA Sales Office (USA)
 Hungary Sales office (EUROPE)

+82)31-904-1444
 +852)2711-5551
 +0755-8663-6929
 +1)866-446-3586
 +36)30-521-7818

coilmaster@coilmaster.com
coilmaster@coilmaster.com
kimha@coilmaster.com
markyang@coilmaster.com
coilmaster@coilmaster.com

- All specifications are subject to change without notice.
- Update date : 2015.10.26

www.coilmaster.com